

Recotherm
BREATHE THE DIFFERENCE

aeris





innovative ventilation technology

Cutting-Edge Humidity Management

Recotherm Aeris technology applies controlled fresh air management to maintain optimal humidity levels in pool halls, effectively preventing condensation, maximising user comfort and minimising energy consumption. This innovative approach ensures the freshest environment and the lowest running costs available on the market.

Unmatched Energy Efficiency

The Aeris 25, 50, 100, 150, and 200 ventilation systems deliver exceptional efficiency, resulting in significant energy savings. Removing a kilogram of moisture with a Recotherm controlled fresh air unit costs just 25% of a typical refrigerant-based dehumidifier system. These measurable efficiencies evidence our commitment to designing environmentally mindful and cost-effective products.



over 40 years of expertise

With more than 40 years of engineering and construction experience, our team has honed its expertise exclusively in pool hall environments. Exceptional design and construction capabilities, paired with extensive on-site experience allow us to deliver bespoke solutions for any application with confidence and precision.

Advanced Fan Technology

The Aeris range features infinitely variable-speed fans powered by the latest energy-efficient EC motors. While building regulations have required variable-speed fans for the past nine years, Recotherm have been incorporating this technology into its units for over 30 years.

Unlike units with only two or three speed settings, Recotherm's fully variable fans can achieve up to 300% greater efficiency, adapting precisely to the speed required.

BREATHE THE DIFFERENCE

Experience enhanced air quality with the Aeris range. By utilising fresh air flow to control humidity, our units create a cleaner, fresher environment and significantly reduce chemical odours, delivering an unmatched atmosphere.

Key Features of Recotherm Aeris Units

- **Efficient Fans:** Warm, humid air is drawn from the pool hall and fresh air is supplied using Blue Fin backward-curve centrifugal fans for enhanced efficiency.
- **Recuperator Technology:** A passive heat exchanger (recuperator) captures heat from the return air and transfers it to incoming fresh air, boosting its temperature before reaching the coil for optimal thermal performance.
- **Fresh Air Management:** The units provide controlled fresh outside air and regulated exhaust of humid air, diluting the pool hall atmosphere to create a cleaner, fresher environment.
- **Energy-Efficient Dehumidification:** Using fresh air to manage humidity eliminates the need for energy-intensive processes, achieving superior results with minimal energy consumption.
- **Precise Energy Usage:** Fully modulating heating valves and dampers adjust dynamically to use only the energy required, maintaining perfect pool hall conditions efficiently.



ENERGY
eco ↑
EFFICIENT

Recotherm
BREATHE THE DIFFERENCE




fully modulating = maximum efficiency

All units are equipped with a fully functioning Building Energy Management System (BEMS) microprocessor. This processor sends signals to fans, valves, and dampers, all of which are fully modulating. This ensures optimal operation at maximum efficiency, minimising energy usage.



OPTIMAL
ENERGY
EFFICIENCY

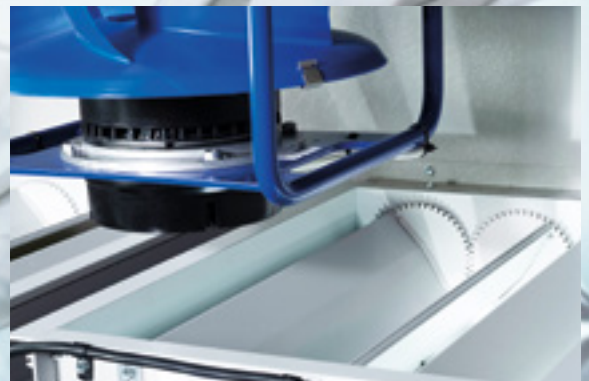

fans, valves & dampers
are always operating to maximum
efficiency to ensure minimal
energy usage

custom control strategies

Our in-house capability to design control strategies, combined with expertise in sophisticated Trend and Distech systems, allows us to offer bespoke programming solutions. As a result, units can be programmed to accommodate individual features such as movable floors and external elements like bi-fold or sliding doors, ensuring intelligent management of environmental changes within the ventilation system.

Quality Build






Designed and manufactured in the UK, Aeris units feature double-skinned, insulated casework panels made from 20-gauge Zintec steel with a durable plastisol coating. This construction prevents heat loss in cold plant rooms and heat soak in warm environments, maintaining optimal air-handling unit performance. The plastisol coating - a blend of PVC and liquid plasticizer - ensures long-lasting durability, even in chlorinated conditions.

ISO-Class 65% Grade Filtration

All units come equipped with disposable, dry pleated panel supply filters. Differential pressure switches on the filter bank trigger a fault signal on the unit's control panel when filters become dirty, simplifying maintenance. Higher-grade filtration options are also available upon request.

Tailored Solutions for Unique Projects

Our in-house environmental engineers are adept at translating complex concepts into practical solutions. For unconventional or unique projects, we excel at designing and delivering tailored systems to meet specific requirements.

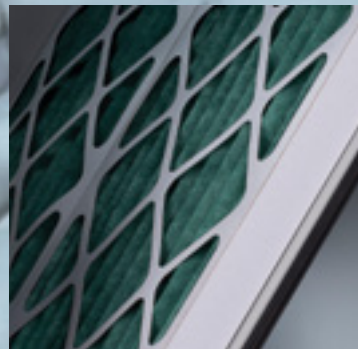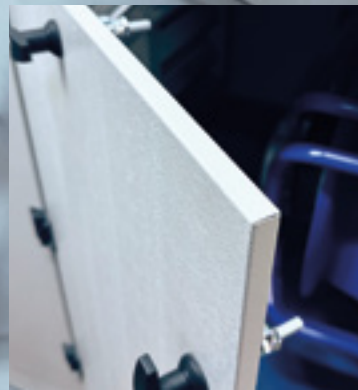



flexible build, delivery and installation

Whether for new installations or replacements, our Aeris units can be delivered fully assembled or in flat-pack sections for on-site assembly, providing flexibility to fit virtually any location. Units can be configured vertically, horizontally or in hybrid orientations and are robust enough for outdoor installations without incurring additional costs.

Additional Capabilities

Aeris units also support features like scented air injection, to further enhance functionality and meet the unique demands of your project.



Industry Leading 3-Year Manufacturer's Warranty

- All Recotherm units include a 12-month on-site warranty, providing essential cover for your new system.
- For added peace of mind, customers can opt for a comprehensive three-year warranty covering all labour and parts in the event of a breakdown. This warranty is available when paired with our Three-Year Maintenance Plan.

Three-Year Maintenance Plan

The Carbon Trust estimates that energy bills can rise by up to 60% if units are not properly maintained. Our Three-Year Fixed-Price Maintenance Plan for new units includes regular servicing and maintenance by a Recotherm engineer as well as parts and labour in the event of a breakdown due to mechanical faults.

Expert Servicing

Our in-house team of highly trained ventilation engineers handles all maintenance needs, from annual visits to more frequent maintenance schedules. During each service every component is thoroughly inspected to ensure the unit operates as efficiently as it did when first commissioned. Regular maintenance prolongs the unit's lifespan and maintains peak energy efficiency.

Aeris Sizes, Weights and Power Consumption

Model	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Power Consumption Full Speed (kW)	Power Consumption Half Speed (kW)
Aeris 25	1100	548	900	110	0.25	0.03
Aeris 50 V	1000	750	1750	370		
Aeris 50 H	1900	1000	850	370	0.55	0.07
Aeris 50 M	1620	760	1600	370		
Aeris 100 V	1150	850	2100	450		
Aeris 100 H	2300	1150	950	450	1.3	0.16
Aeris 100 M	1800	834	1700	450		
Aeris 150 V	1190	1150	2300	550		
Aeris 150 H	2400	1190	1250	550	1.87	0.23
Aeris 150 M	2250	1150	1900	550		
Aeris 200 V	1500	1500	2600	750		
Aeris 200 H	2700	1500	1600	750	2.35	0.29
Aeris 200 M	2500	1150	2000	750		

3 YEAR **WARRANTY**
Recotherm
BREATHE THE DIFFERENCE

3 YEAR **FIXED PRICE MAINTENANCE PLAN**
Recotherm
BREATHE THE DIFFERENCE

Our clients are
breathing the difference,
visit our website to find out
more about how you or
your clients can too.



Visit our website,
simply scan the code
using your phone's camera
or go to **recotherm.co.uk**

enquiries@recotherm.co.uk

01527 894533

-  facebook.com/recotherm
-  linkedin.com/company/recotherm-limited
-  instagram.com/recothermltd
-  youtube.com/@recotherm

Unit H, Astwood Bank Business Park
Astwood Lane, Astwood Bank
Redditch B96 6HH

Recotherm
BREATHE THE DIFFERENCE